


Satuma Oy  
Happolantie 16  
82200 Hammaslahti


## IP-kameran liittäminen Buffalon LinkStationiin...

Luo uusi käyttäjätunnus ja salasana:

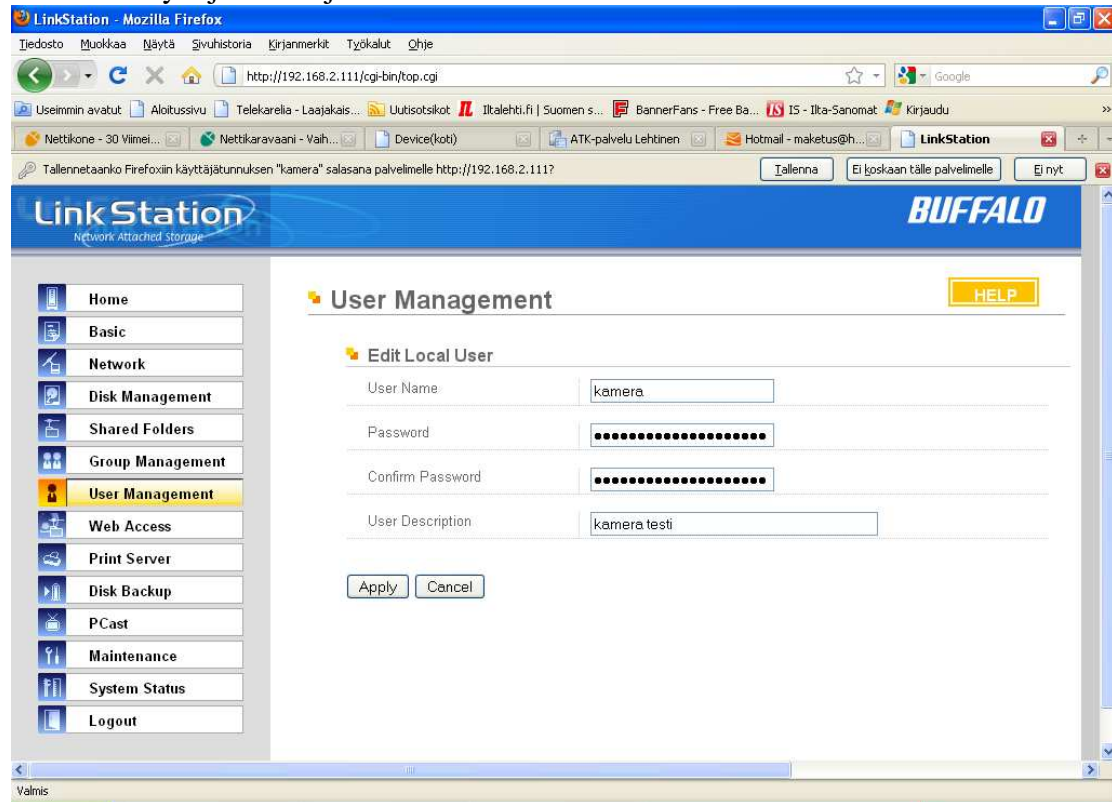

The screenshot shows the LinkStation web interface in Mozilla Firefox. The browser address bar shows `http://192.168.2.111/cgi-bin/top.cgi`. The page title is "Link Station" and "BUFFALO Network Attached Storage". The left sidebar contains a navigation menu with "User Management" selected. The main content area is titled "User Management" and contains a "HELP" button and an "Edit Local User" section. The form fields are: User Name: kamera; Password: [masked]; Confirm Password: [masked]; User Description: kamera testi. There are "Apply" and "Cancel" buttons at the bottom of the form.

Tee uusi jaettu kansio esim..kamera ja siihen ftp palvelu päälle.

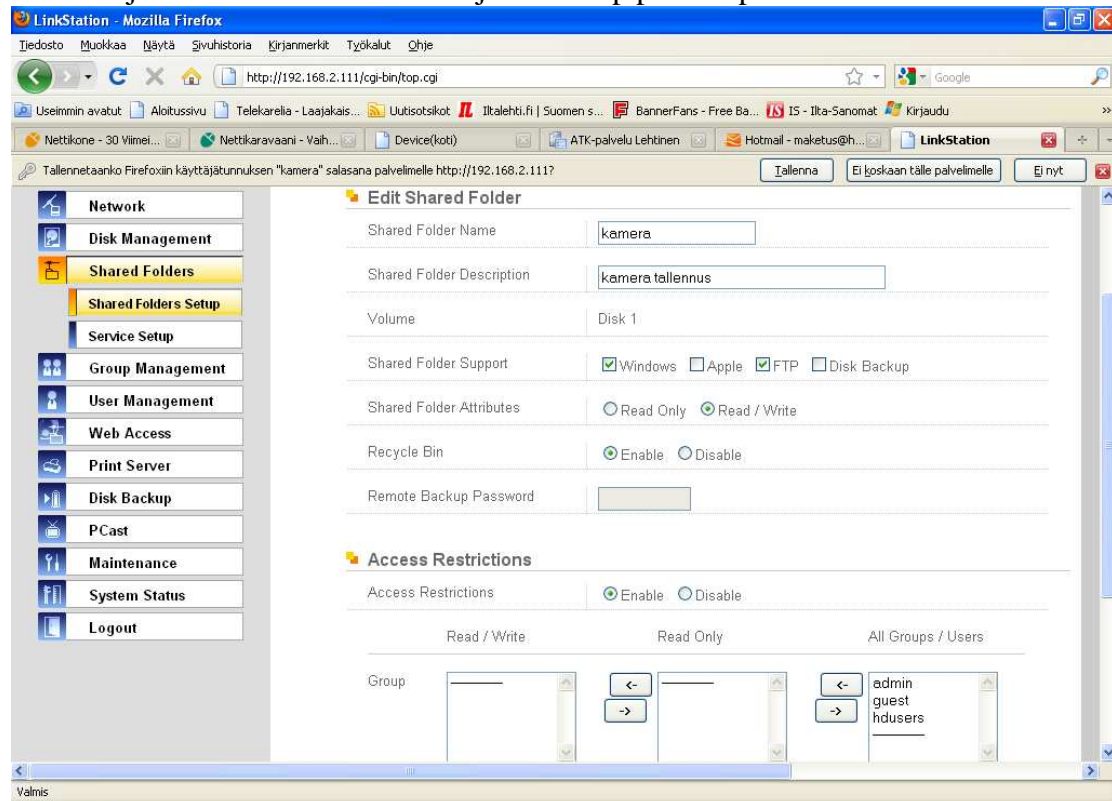

The screenshot shows the LinkStation web interface in Mozilla Firefox. The browser address bar shows `http://192.168.2.111/cgi-bin/top.cgi`. The page title is "Link Station" and "BUFFALO Network Attached Storage". The left sidebar contains a navigation menu with "Shared Folders" selected. The main content area is titled "Edit Shared Folder" and contains several form fields: Shared Folder Name: kamera; Shared Folder Description: kamera.tallennus; Volume: Disk 1; Shared Folder Support:  Windows,  Apple,  FTP,  Disk Backup; Shared Folder Attributes:  Read Only,  Read / Write; Recycle Bin:  Enable,  Disable; Remote Backup Password: [empty]. Below these fields is the "Access Restrictions" section, which has  Enable and  Disable. At the bottom, there are three columns for "Read / Write", "Read Only", and "All Groups / Users". The "All Groups / Users" column contains a list of groups: admin, guest, and hdusers.

Satuma Oy  
Happolantie 16  
82200 Hammaslahti

## Lisää luomasi käyttäjätunnus kansion oikeuksiin. "Access Restrictions"

The screenshot shows the LinkStation web interface in Mozilla Firefox. The browser address bar shows `http://192.168.2.111/cgi-bin/top.cgi`. The interface has a left sidebar with menu items: Print Server, Disk Backup, PCast, Maintenance, System Status, and Logout. The main content area is titled "Access Restrictions" and includes a "Recycle Bin" section with "Enable" and "Disable" radio buttons. Below it is a "Remote Backup Password" field. The "Access Restrictions" section has "Enable" and "Disable" radio buttons. It features three columns: "Read / Write", "Read Only", and "All Groups / Users". Each column has a "Group" and "User" list with arrows for adding and removing items. In the "Read / Write" column, "kamera" is listed under "User". In the "Read Only" column, "guest" is listed under "User". In the "All Groups / Users" column, "admin", "guest", and "hdusers" are listed under "Group", and "admin", "guest", and "kamera" are listed under "User". "Apply" and "Cancel" buttons are at the bottom. A footer note reads "Copyright 2002-2007 (C) BUFFALO INC. All Rights Reserved."

kamera asetuksiin laitetaan palvelimen tiedot ja salasanan yms..

The screenshot shows the Device(koti) web interface in Mozilla Firefox. The browser address bar shows `http://192.168.2.7/`. The interface has a left sidebar with menu items: Device Status, Live Video, Device Management, Alias Settings, Date & Time Settings, Users Settings, Basic Network Settings, Wireless Lan Settings, ADSL Settings, UPnP Settings, DDNS Service Settings, Mail Service Settings, FTP Service Settings, Alarm Service Settings, Upgrade Device Firmware, Restore Factory Settings, Reboot Device, and Log. The main content area is titled "Real-time IP Camera Monitoring System" and features a "FTP Service Settings" section. This section includes fields for "FTP Server" (192.168.2.111), "FTP Port" (21), "FTP User" (kamera), "FTP Password" (masked with dots), "FTP Upload Folder" (disk1/kamera), and "FTP Mode" (PASV). There is a "Test" button and a note "Please set at first, and then test." Below this is an "Upload Image Now" checkbox. "Submit" and "Refresh" buttons are at the bottom. A footer note reads "Valmis".